

Planning Commission Minutes
December 14, 2023

(The agenda was filed with the City Clerk of The City of Oklahoma City at 7:35 a.m. on December 11, 2023)

28. (PUD-1976) Application by Kelly J and Ian J Smith to rezone 10807 SW 29th Street from AA Agricultural District to PUD-1976 Planned Unit Development District. Ward 3.

Amended Technical Evaluation:

1. Modify front setback to specify *garages* shall be located no less than 18 feet from the back of the sidewalk.
2. Lot size and lot width is per dwelling unit.
3. Amend the Master Design Statement to require a minimum amount of open space commensurate with what is shown on the conceptual plan, and increase the amount of open space provided in the northwest portion of the subdivision.
4. ~~All lots with a 30-foot lot width shall be limited to a one-car garage and a driveway no wider than 12 feet.~~
5. Maneuvering in the right-of-way shall be allowed within this PUD to access on-street angled parking spaces. Establishment of angled parking spaces is subject to obtaining necessary approvals, including from Traffic & Transportation Commission and City Council, as required.
6. The Master Design Statement shall be amended to the one dated December 13, 2023, except that the minimum lot width shall be 40 feet and minimum lot size shall be 4,000 square feet.

The applicant was present. There were protestors present.

RECOMMENDED DENIAL.

MOVED BY MEEK, SECONDED BY CLAIR

AYES: CLAIR, MEEK

NAYS: GOVIN, PENNINGTON, NOBLE, LAFORGE

ABSENT: POWERS, PRIVETT, NEWMAN

MOTION FAILED.

RECOMMENDED APPROVAL SUBJECT TO TECHNICAL EVALUATION AS AMENDED.

MOVED BY LAFORGE, SECONDED BY NOBLE

AYES: CLAIR, GOVIN, PENNINGTON, NOBLE, LAFORGE

NAY: MEEK

ABSENT: POWERS, PRIVETT, NEWMAN



STAFF REPORT
The City of Oklahoma City
Planning Commission
December 14, 2023

Item No. IV. 28.

(PUD-1976) Application by Kelly J and Ian J Smith to rezone 10807 SW 29th Street from AA Agricultural District to PUD-1976 Planned Unit Development District. Ward 3.

I. GENERAL INFORMATION

A. Contacts

1. Applicant/Developer Representative

Name Mark Zitzow
Company Johnson & Associates
Phone 405-235-8075
Email mzitzow@jaokc.com

B. Case History

This application was continued from the November 9, 2023 meeting.

C. Reason for Request

The purpose of this application is to allow residential use and development.

D. Existing Conditions

1. Comprehensive Plan Land Use Typology Area: Urban – Low Intensity (UL)

UL applies to the least intensively developed areas of the city that still receive urban water, sewer, police, park and fire services. Development in this area should provide horizontal integration of land uses, connectivity within and between individual developments, and design that facilitates pedestrian and bicycle transportation.

2. Size of Site: 46.71 acres

3. Zoning and Land Use

	Subject Site	North	East	South	West
Zoning	AA	AA	AA	PUD-1179	PUD-1185/AA
Land Use	Undeveloped	Turnpike	Undeveloped	Residential	Residential

II. SUMMARY OF PUD APPLICATION

8.1 USE AND DEVELOPMENT REGULATIONS

The use and development regulations of the **R-1, “Single Family Residential” District** shall govern this PUD, except as herein modified below.

9.0 SPECIAL CONDITIONS:

The following special conditions shall be made a part of this PUD:

Permitted Uses:

- Child Care Centers (8300.25)
- Community Recreation: General (8250.2)
- Community Recreation: Property Owners Association (8250.3)
- Community Recreation: Restricted (8250.4)
- Family Day Care Homes (8300.40)
- Low Impact Institutional: Residential-Oriented (8200.5)
- Low Impact Institutional: Neighborhood Related (8250.14)
- Model Home (8200.8)
- Model Home Accessory Parking Lot (8200.9)
- Single-Family Residential (8200.14)
- Two-Family Residential (8200.15)

All other conditional, accessory, special or special exception uses not specifically prohibited shall be permitted subject to the review and approval processes specified in the Zoning Code.

9.1 ARCHITECTURAL REGULATIONS

Exterior building wall finish on all primary structures, exclusive of windows and doors, shall consist of a minimum 55% brick veneer, rock, concrete board or stone masonry. No more than 45% Engineered Composite wood products, Engineer Wood Products (EWP) Smartside, cement based, solid wood types, wood or other non-masonry materials shall be permitted. Exposed metal or exposed concrete block buildings shall not be permitted on primary structures.

9.2 LANDSCAPING REGULATIONS

The subject site shall meet all requirements of the City of Oklahoma City’s Landscaping Ordinance in place at the time of development, except as otherwise noted.

9.3 LIGHTING REGULATIONS

The site lighting in this PUD shall be in accordance with Chapter 59, Article XII, Section 59-12350 of the Oklahoma City Municipal Code, 2020, as amended.

9.4 SCREENING REGULATIONS

No less than a six-foot and no greater than an eight-foot-high sight proof screen shall be required along boundaries adjacent to residential uses. Said sight-proof screen may be constructed of stucco, brick, stone, wood, steel/iron and/or any combination thereof and shall be solid and opaque.

A four (4) foot fence shall be permitted adjacent to all common areas within this PUD.

9.5 PLATTING REGULATIONS

Platting shall be per the City of Oklahoma City Subdivision Regulations.

9.6 DRAINAGE REGULATIONS

Development of this parcel will comply with Chapter 16 of the Oklahoma City Municipal Code, 2020, as amended.

9.7 DUMPSTER REGULATIONS

Roll off dumpsters shall be permitted within this PUD during the pendency of construction.

9.8 VEHICULAR ACCESS REGULATIONS

Access shall be per the City of Oklahoma City Subdivision and Zoning Regulations. No more than three (3) access points shall be permitted along SW 29th Street and no connections shall be required to the east or the north given physical constraints.

Boulevard-style entrances shall be permitted.

Maneuvering within the right-of-way shall be permitted within this PUD.

9.9 PARKING REGULATIONS

The number and design of all parking facilities in this PUD shall be in accordance with Section 59, Article X of the Oklahoma City Municipal Code, 2020, as amended. Only one space shall be required per lot and the garage space may count toward this requirement.

9.10 SIGNAGE REGULATIONS

Signage shall be per the base zoning district.

9.11 ROOFING REGULATIONS

All structures in this PUD shall have Class C roofing or better.

9.12 PEDESTRIAN ACCESS/SIDEWALK REGULATIONS

Five-foot wide sidewalks shall be constructed along SW 29th St. Said sidewalks shall be 6-foot wide if the sidewalk is constructed adjacent to the curb, subject to the policies/procedures of the Public Works Department. All sidewalks shall be in place prior to any occupancy certificates being issued. Internal sidewalks shall be required per code.

9.13 HEIGHT REGULATIONS

The maximum building height for structures shall be per the base zoning district.

9.14 SETBACK REGULATIONS

Setbacks for individual lots shall be:

Front: 10 feet, driveways shall be provided no less than 18 feet from the back of the sidewalk.

Side: 5 feet

Rear: 10 feet

9.15 LOT COVERAGE

The maximum lot coverage shall be 70%.

9.16 LOT WIDTH

The minimum lot width within this PUD shall be 30 feet.

9.17 LOT SIZE

The minimum lot size for this PUD shall be 3,000 sf.

9.18 PUBLIC IMPROVEMENTS

The Developer shall make public improvements throughout the PUD as may be required by The City of Oklahoma City Public Works Department or other City, County, or State Department or agency. All Local, State, and Federal ordinances as they shall apply to the site will be adhered to fully.

9.19 COMMON AREAS

Maintenance of the common areas in the development shall be the responsibility of the developer and/or the Property Owners Association. No structures, storage of material, grading, fill, or other obstructions, including fences, either temporary or permanent, that shall cause a blockage of flow or an adverse effect on the functioning of the storm water facility, shall be placed within the common areas intended for the use of conveyance of storm water, and/or drainage easements shown. Certain amenities such as, but not limited to, walks, benches, piers, and docks, shall be permitted if installed in a manner to meet the requirements specified above.

9.20 GENERAL DESIGN AND DEVELOPMENT GUIDELINES

Specific information and plans for General Design and Development Guidelines are contained in Chapter 59, Section 14200.4, for density, amenities, relationship to abutting uses, site design, safety, and circulation systems.

9.21 SPECIFIC PLAN AND PERMITTING REQUIREMENTS

A specific plan shall not be required for this PUD.

10.0 DEVELOPMENT SEQUENCE:

Developmental phasing shall be allowed as a part of the development of this PUD. Required traffic improvements shall be permitted to be constructed in conjunction with the phased development of this PUD, as approved by the City's Traffic Division.

11.0 EXHIBITS:

The following exhibits are hereby attached and incorporated into this PUD. These exhibits are:

- A: Legal Description
- B: Conceptual Master Development Plan

III. REVIEW COMMENTS

This application was submitted to the following agencies, departments, and/or divisions for review and comment. An asterisk indicates that the agency, department, and/or division responded with no adverse comments.

A. Outside Agencies

1. Oklahoma City-County Health Department

2. Oklahoma City Urban Renewal Authority (OCURA)

3. Oklahoma Gas and Electric (OGE)

4. Oklahoma Natural Gas: Please be advised ONG has an underground or aboveground facility in the area. If you need our facilities relocated to accommodate your excavation or construction, ONG will provide you a cost estimate. Prior to excavation, please contact OKIE-ONE 1-800-522-6543 a minimum of 48 hours prior for exact location of our facilities.

5. Oklahoma Water Resources Board (OWRB)

6. School District(s) Mustang

7. Oklahoma Department of Transportation (ODOT)

B. City Departments

1. Airports

2. Central Oklahoma Transportation and Parking Authority (COTPA)

3. Fire

4. Information Technology/Geographic Support

5. Parks and Recreation

6. Police

7. Public Works

a. Engineering

b. Streets, Traffic and Drainage Maintenance

Storm Sewer Availability

- 1) The Public Works Drainage Division staff has reviewed the subject application. All development, new construction, and/or substantial improvements planned within the proposed area shall be subject to chapter 16 of the Oklahoma City Municipal Code.
- 2) Storm sewers in accordance with the City's Drainage Ordinance will be required. Development abutting section line roads with drainage flows that exceed the capacity of OKC standard ditch detail (D-100) will necessitate the installation of enclosed storm sewer and/or concrete channel. These improvements shall be placed to provide a minimum of 35' clearance distance from the centerline of the section. Concrete channels must be entirely outside public right-of-way.
- 3) A flood and/or drainage study will be required to establish finished floor elevations, common lot areas or private drainage easements. A final plat should not be submitted until the study has been reviewed and approved by the Public Works Department.

- 4) Flood Study will be required to show no rise in FEMA Q 100 and the City of Oklahoma City Q 100 water surface elevation, compared pre-and post-development.
- 5) A portion of subject property is situated within a F.E.M.A. Flood Plain. Therefore, the establishment of Minimum Finish Floor Elevation for each lot within the flood plain will be required (100-year) frequency plus 1'. The Public Works Department Engineering staff shall approve these elevations prior to the filing of the final plat.
- 6) A floodplain activity permit must be submitted for any work contemplated in The Waters of the United States.
- 7) A Corps of Engineers 404 permit must be submitted with plans for any work contemplated within the floodplain, creek, or channel (waters of the United States) included in the case limits.
- 8) Plans for drainage improvements within the private drainage reserves and/or common areas must be submitted for review, and payment of inspection fees shall be made prior to construction. Building permits will not be issued until construction is complete. If a subdivision abuts a stream, the private drainage easements and/or common area along stream shall extend to flow line of stream at a minimum.
- 9) Place the following note on the plat and construction plans: Maintenance of the Common Areas and/or Private Drainage Easements shall be the responsibility of the property owner. No structures, storage of material, grading, fill or other obstructions, including fences, either temporary or permanent shall be placed within the common areas and/or drainage easements shown.
- 10) Drainage easements shall be clearly denoted as public or private in owner's dedication, on the plat, and/or in the plat notes.
- 11) Construction within the limits of this PUD will require an erosion control plan in accordance with EPA Storm Water Discharge permitting: CFR Vol. 57, No. 175, September 9, 1992. A copy of the EPA Notice of Intent (NOI) will be required prior to the issuance of work orders or permits for construction activities disturbing an area of 1/2 acre or greater.
- 12) Sidewalk shall be installed for all new construction and/or at the time of a residential use to a more intense use on all lots having frontage on public streets classified as a major or minor arterial.
- 13) All private roads /streets will have private storm sewer systems.
- 14) Engineer/developers will be contacting PW for detention determination before they submit their final plat and plans.

c. Stormwater Quality Management

d. Traffic Management*

8. Utilities

a. Engineering

Paving

Wastewater Availability

- 1) An existing 21” wastewater main(s) is located adjacent to the subject site(s).
- 2) Line capacity is not guaranteed and must be checked by the Engineer of Record and reviewed by the City.
- 3) The developer will be required to extend the City wastewater collection system to and across each lot or site within the subdivision in accordance with the City Standard Specifications and Private Development Design Manual.
- 4) Minimum ten (10) feet horizontal separation is required from water mains and five (5) feet for other utilities. Minimum two (2) feet vertical separation required for all crossings. All wastewater mains must have a minimum cover of four (4) feet and depth no greater than eighteen (18) feet. Developer is responsible for remediating any failure to maintain the minimum four (4) feet of cover.
- 5) Wastewater main(s) must be centrally located in a twenty (20) feet wide easement or larger if necessary. No trees, signs, dumpster, fence, and/or structures shall be permitted over any proposed or existing utility main. An approved revocable permit must be obtained to have any private improvement located within any utility easement and/or right-of-way.
- 6) All existing unused private wastewater service connections must be abandoned and capped at the main in accordance with City Standard Specifications and Private Development Design Manual.

b. Solid Waste Management

- 1) The City can provide service, providing there is sufficient space for the truck to maneuver to service the addition.

c. Water/Wastewater Quality

Water Availability

- 1) An existing 12” water main(s) is within the required distance to the subject site and the developer will be required to extend a 12-inch or larger water main along street frontage and will be required to extend the water system to each lot or site within the development in accordance with City Standard Specifications and Private Development Design Manual.
- 2) A 12-inch water main is required to be looped through the development to provide adequate water supply and fire flow protection. Connection to two (2) separate active water mains is required to prevent partial or total shut-off of water supply when a pipeline failure occurs.

- 3) Minimum ten (10) feet horizontal separation required from wastewater mains and five (5) feet for other utilities. Minimum two (2) foot vertical separation required for all utility crossings. All water mains must have a minimum cover of five (5) feet along section line roads and four (4) feet elsewhere.
- 4) Proposed and/or existing water mains must be located centrally within a twenty (20) feet wide or larger utility easement or right-of-way. No trees, signs, dumpster, fence, and/or structures shall be permitted over any proposed or existing utility main. An approved revocable permit must be obtained to have any private improvement located within any utility easement and/or right-of-way.
- 5) Dead-end water mains must be avoided when possible. All existing unused water services must be capped and abandoned at the water main in accordance with the City Standard Specifications.
- 6) In accordance with ODEQ regulations, the City provides water at a minimum pressure of 25 psi. The developer is responsible for designing and construction of all fixtures to provide adequate domestic and fire protection under minimum pressure conditions. The developer will be responsible for any failure of domestic or fire protection systems which require water pressure in excess of 25 psi. The developer is responsible for installing pressure reducers if necessary for protection of developer's service lines, plumbing, and fixtures.
- 7) All existing and/or proposed water meters must be located in the right-of-way and/or utility easement within grassy areas outside of sidewalks, driveways, streets, and paving.
- 8) All domestic and fire suppression services must have a separate water service connection. Fire hydrant spacing shall not exceed 500 feet and must be located within ten (10) of a hard surface (i.e. sidewalk, street, paving).
- 9) Supply capacity for development is not guaranteed and will be reviewed at time of review of construction documents.

9. Planning

a. Comprehensive Plan Considerations

1) LUTA Development Policies:

Site Design:

- Avoid developing within or modification of 100-year floodplains or floodways.
- Large-scale (20+ acres or 50 or more single family units) residential subdivisions should provide a diversity of home sizes, lot sizes, price points, architectural styles, and density ranges.
- Where possible, provide a continuous system of open space along stream corridors or other appropriate areas that link neighborhoods and park lands.
- Utilize Best Management Practices (BMP) for stormwater whenever possible.

- Developments should be served by urban water and sewer utility systems.

Floodway, 100- and 500-year floodplain are present on the subject site. The development is required to comply with all City, State, and Federal requirements within the floodplain. Public water and sewer are available.

Location:

- Locate uses that generate high traffic volumes along arterial streets, frontage roads, and interstates.

The subject site has access to SW 29th Street, an arterial street.

Density: The Urban Low Intensity LUTA outlines a density range of 4 to 8 dwelling units per acre for single family. *The conceptual plan indicates 311 single-family residential lots over 47.63 acres, or 6.52 du/acre.*

Automobile Connectivity:

- Maintain, create, and enhance a street network that is highly connected to increase number of viable commercial locations and the effectiveness of the transportation system.
- Limit number of dead-end streets and cul-de-sacs.
- Limit curb cuts on arterial streets, and where possible concentrate access at shared entrance points.
- Development fronting arterials should take access from intersecting streets where possible.
- Primary entrance points should be aligned with access points immediately across the street.
- Provide vehicular connectivity between adjacent developments.
- Subdivisions with more than 50 units should have at least two points of entrance / egress no closer than 300 feet apart.

Access is proposed via up to three points along SW 29th Street. A street stub is shown west and would be required per the Subdivision Regulations. The PUD states no connections shall be required to the east or the north given physical constraints. This would require a variance at the time of platting.

Pedestrian Connectivity:

- Provide sidewalk connections to adjacent development.

Sidewalks are required along arterial streets and within new urban subdivisions.

- 2) **Compatibility:** The comprehensive plan includes a land use compatibility matrix used to identify potential conflicts between major land use categories. When locating the proposed uses adjacent to existing Agricultural or Low Intensity Residential uses or zoning, “Building Scale and Site Design” are potential compatibility issues identified by the comprehensive plan.

Building Scale and Site Design: The comprehensive plan calls for mitigation measures for new projects if residential lot sizes in UL are less than 60% of directly adjacent residential lots, the setbacks are significantly deeper or more

shallow than the predominant character of adjacent development; the building's orientation to the street differs from the predominant character of adjacent development; building size or street frontage dramatically differs from that of adjacent uses, the lot coverage (including buildings and paved areas) dramatically exceeds that of adjacent uses, or if buildings within 40 ft. of a single-family residential structure exceed a 3:1 ratio in height. *The PUD proposes an R-1 base with reduced lot sizes of a minimum 3,000 square feet and 30-foot-wide lots. The site does not abut other platted lots but does abut a residence on a 9-acre residential parcel on the west.*

3) Service Efficiency:

- Water: *Served – Close to Service or Served*
- Sewer: *Served – Open Sewer Sheds or Served*
- Fire Service: *Urban Service Level*

4) Environmentally Sensitive Areas: The following apply to the proposed development site:

- Riparian Areas: Riparian areas are vegetated areas adjacent to streams, lakes, ponds, and wetlands that are composed of a mixture of trees, shrubs, and grasses. These areas may also contain floodplain. The comprehensive plan recommends a 100-foot buffer from stream banks. *Riparian area including floodplain is present on the east side of the subject site. The conceptual plan indicates the existing pond will be incorporated into the design of the subdivision.*
- Upland Forests: N/A
- Vulnerable Aquifers: The aquifer in this area is considered highly vulnerable to depletion. The comprehensive plan recommends preserving natural open spaces and utilizing low impact development techniques whenever possible in new developments in order to maintain water quality and allow for the infiltration of stormwater onsite.

5) Transportation System: This site is located off SW 29th Street, a Minor Arterial Street in the Urban Low LUTA. Transit (bus) service is not available.

6) Other Development Related Policies

- Support diversity and integration of housing unit types and sizes in all land use typology areas in order to meet the diverse needs of households of different sizes, generational needs, incomes, and preferences. New residential subdivisions should achieve a mixture of housing types within a unified development. (SU-4)
- Require sidewalks on both sides of all streets in urban LUTAs. (C-7)
- Improve the functionality and efficiency of the street network by:
 - Providing direct connections from residential developments to nearby places and to each other.
 - Providing street and sidewalk stubs to adjacent vacant land in anticipation of future development.

- Connecting new development to existing street and sidewalk stubs, and to existing trail, open space, and bicycle networks.
- Reducing block sizes and use of dead-end streets.
- Maintaining the existing street grid to preserve connectivity and mobility options. (C-11)
- Limit driveways on arterials and collectors and increase connections between uses to improve safety and traffic efficiency. (C-30)
- Ensure proper access to and between subdivisions in order to offer a choice in routes for residents, multiple access points for emergency responders, and to reduce vehicle congestions at arterial intersections. Contiguous developments should share access whenever feasible. (C-32)
- Avoid under-grounding streams to the greatest extent possible. Where feasible, encourage the re-surfacing of buried streams. Limit the use of culverts or other structures that alter natural streams, and require designs that minimize impacts to stream health and function. (G-11)
- Preserve mature, healthy trees and incorporate them into the design of new development or redevelopment projects to the greatest extent possible. (G-26)
- Incorporate natural features (such as ponds, lakes, streams, rock outcroppings, stands of mature trees, and/or sizeable individual trees) into the design of all residential, commercial, and industrial projects rather than eliminating, hiding, or limiting access to those features. (E-31)
- Encourage unified planning for all adjoining land owned or controlled by a project's developer to ensure proper circulation and land use relationships (SU-47)

b. Plan Conformance Considerations

The subject site is located along the north side of SW 29th Street, in an area generally located south of the John Kilpatrick Turnpike and west of S Sara Road. The site is zoned AA and currently undeveloped. Access to the Turnpike is available east of S Sara Road and the Turnpike runs adjacent to the northern boundary of the site. Tributary 2 of Mustang Creek runs along the eastern boundary of the subject site followed by undeveloped AA zoned land, and SPUD-1555, which became effective in November 2023 and allows a gas station at the northwest corner of SW 29th Street and S Sara Rd. The riparian area adjacent to the tributary includes floodway, 100- and 500- year floodplain, however most of the floodway is outside the site boundary. Across SW 29th Street to the south is Tract 1 of PUD-1179 which allows R-1 uses and is developed with single-family residential development. Adjacent on the west is PUD-1185, which was rezoned from AA in 2006 to allow a second house to be built on the property, and a 73-acre parcel zoned AA, which is developed with a single-family residence and maintains a large area devoted to agricultural uses.

The PUD is requested for a small-lot single family and/or two-family (duplex) residential subdivision. The PUD proposes reduced lot sizes (minimum 3,000 square feet) and reduced lot widths (30 feet). The PUD also requests a reduced front setback of 10 feet instead of 20 feet but requires garages to be at least 18 feet back from the back of sidewalk. The conceptual design of the subdivision indicates an overall density within the Urban Low LUTA range. The site will have two accesses to SW 29th Street and a future stub in the northwest corner of the site. The design incorporates the pond into the subdivision, but the Master Design Statement does not include a corresponding minimum amount of open space that will be provided over and beyond the requirements of the Subdivision Regulations.

Plan conformance would be strengthened by requiring a minimum amount of open space commensurate with the conceptual plan, providing additional open space that is accessible to lots on the northwest portion of the subdivision, and providing a landscape buffer or larger lots along the west boundary of the PUD where adjacent to PUD-1185. If 30-foot lots are approved, driveways should be limited to 12 feet in width with single car garages to limit the amount of paved surface and allow space for front yard trees. Additional on-street parking may be necessary. If other than on-street parallel parking is provided, the PUD should specify that maneuvering in the right-of-way is allowed, but parking is subject to necessary approvals, including from Traffic & Transportation Commission and City Council, if required.

IV. STAFF RECOMMENDATION

Staff recommendations are advisory only and do not constitute Planning Commission decisions. Staff recommendations are based on a technical evaluation of information submitted at the time of review. Determination of conformance with policies contained in the comprehensive plan is the purview of the Planning Commission. Planning Commission decisions require a vote of five members to approve or deny an item. The Planning Commission may consider in its decision-making process any additional relevant information presented at the public hearing by the public, applicant, and/or City departments.

Approval of the application subject to the following Technical Evaluations:


1. Modify front setback to specify *garages* shall be located no less than 18 feet from the back of the sidewalk.
2. Lot size and lot width is per dwelling unit.
3. Amend the Master Design Statement to require a minimum amount of open space commensurate with what is shown on the conceptual plan, and increase the amount of open space provided in the northwest portion of the subdivision.

4. All lots with a 30-foot lot width shall be limited to a one-car garage and a driveway no wider than 12 feet.
5. Maneuvering in the right-of-way shall be allowed within this PUD to access on-street angled parking spaces. Establishment of angled parking spaces is subject to obtaining necessary approvals, including from Traffic & Transportation Commission and City Council, as required.

All Engineering Division and Water/Wastewater Utilities Division requirements must be met. Additional changes to the PUD may be required during either Divisions' review of construction plans and prior to City Council approval.

cl

Case No: PUD-1976 Applicant: Kelly J. Smith and Ian J. Smith
Existing Zoning: AA
Location: 10807 SW 29th Street


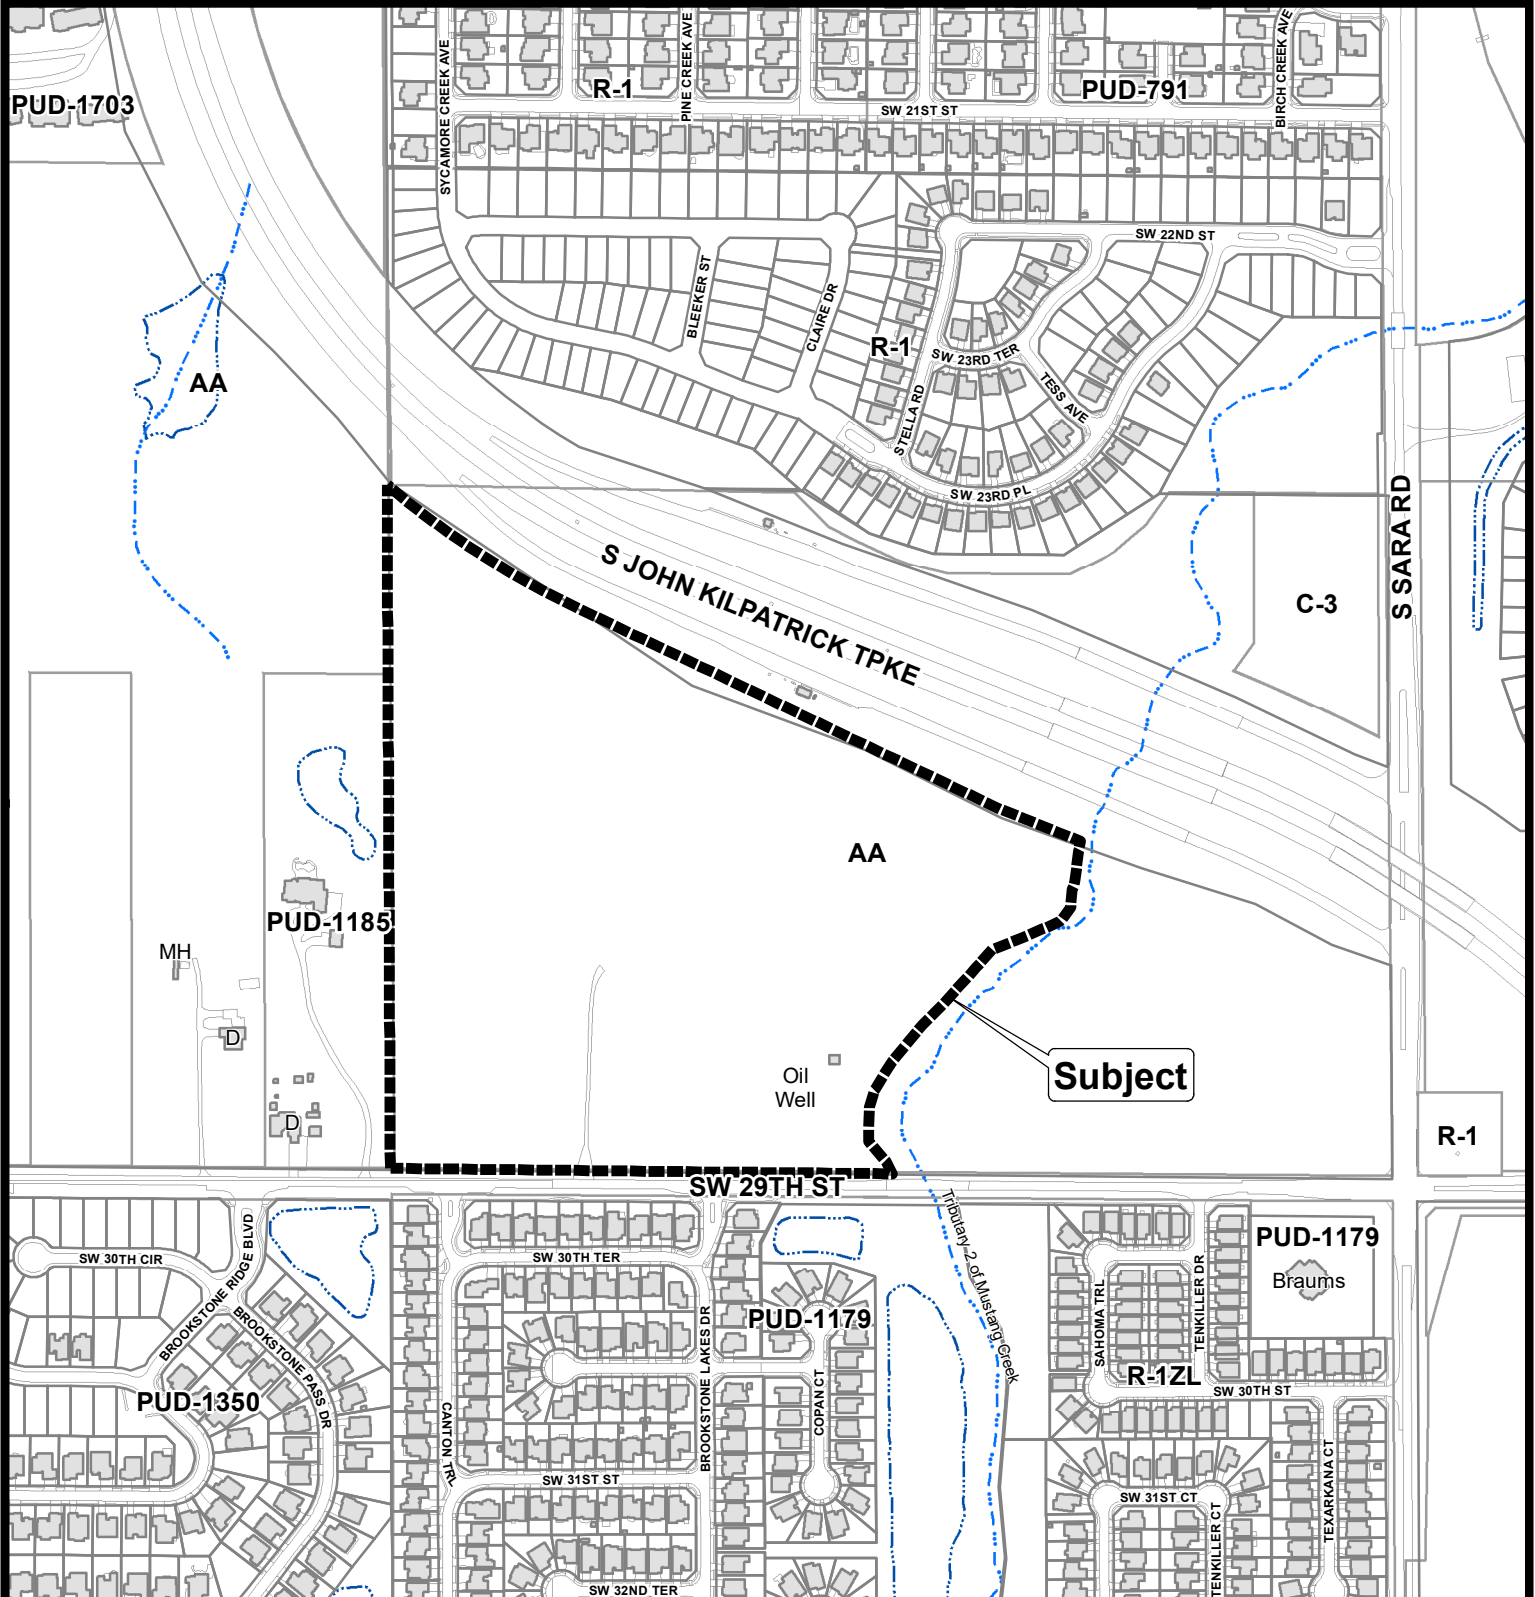


The City of
OKLAHOMA CITY

Planned Unit Development



0 250 500
Feet

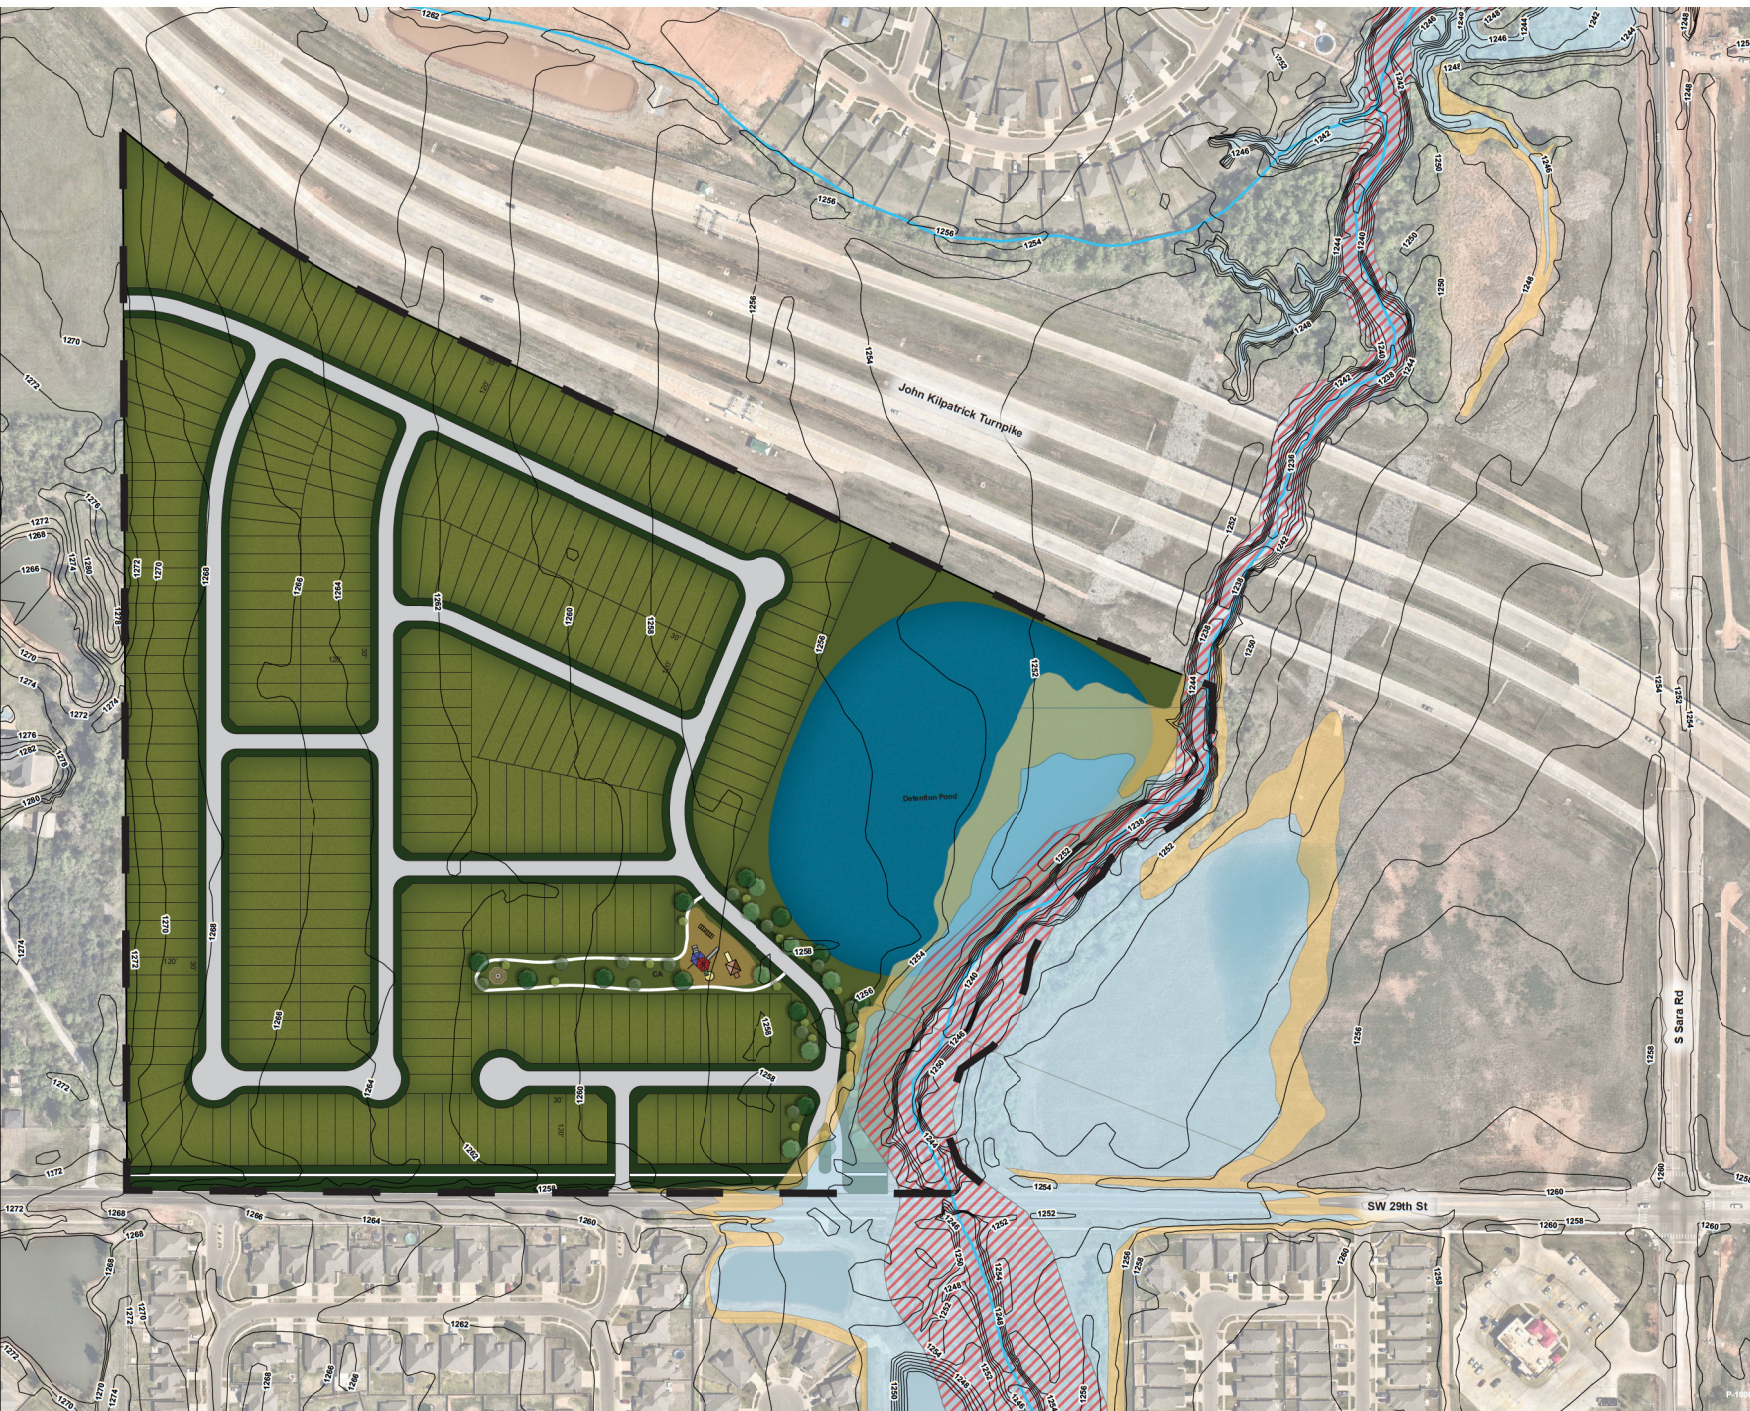

PUD-1976 SW 29th Residential

Exhibit B
Conceptual Master Development Plan

311 Total Lots

+/-47.6312 acres



Johnson & Associates
1 E. Sheridan Ave., Suite 200
Oklahoma City, OK 73104

PHYSICIAN SURVIVORS PLANNERS
9/28/23

Conceptual site plan showing feasible option
permitted under proposed rezoning

P-1400

Case No: PUD-1976 Applicant: Kelly J. Smith and Ian J. Smith
Existing Zoning: AA
Location: 10807 SW 29th Street



Aerial Photo from 2/2022



The City of
OKLAHOMA CITY

Planned Unit Development



0 250 500
Feet